
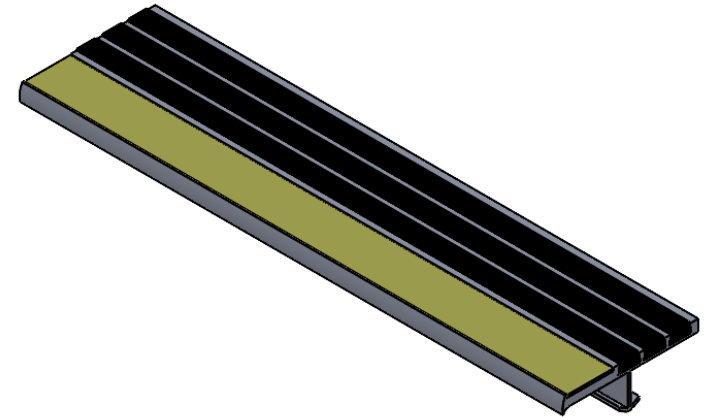


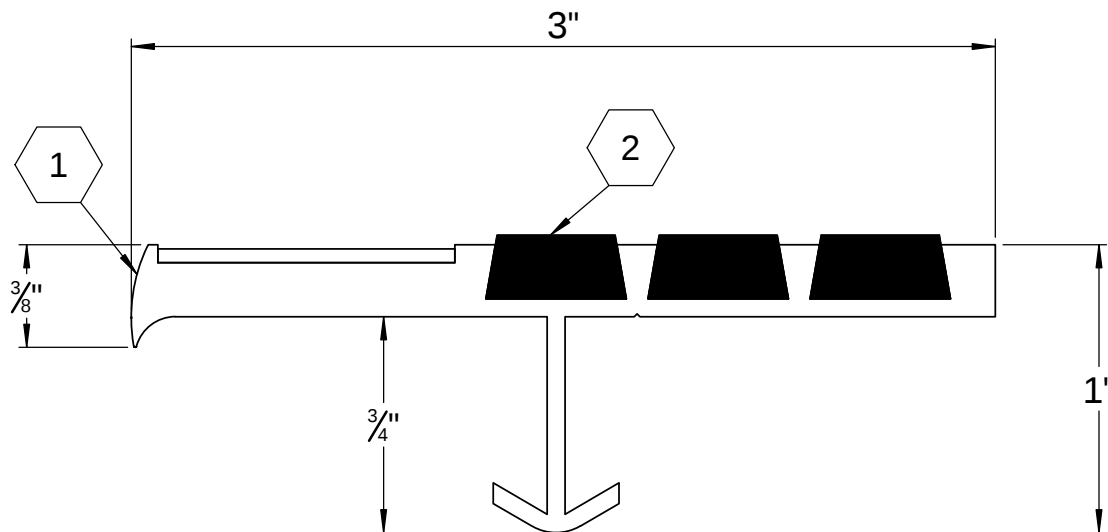

MODEL P3E-ECO

(SINGLE STAGE ECO-TREAD RIBS)

SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-6
- ② **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES
ENCAPSULATED IN A WEAR AND WATER
RESISTANT ELASTOMERIC NETWORK. 2 PART
EPOXY, LOCKED INTO EXTRUDED CHANNELS
3. **BASE FINISH:** MILL
4. **POURED CONCRETE STAIRS:** NOSING SHALL
TERMINATE NO MORE THEN 3" FROM END OF
STEPS
5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"
CLEARANCE

6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW,
BLACK-BLUE, BLACK-GRAY
7. **LENGTH:** 12'0" MAXIMUM
8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-
LUMINESCENT MATERIAL SHALL NOT BE LESS
THAN 1"

LENGTH	QTY	COLOR

PROJECT:				
ARCHITECT:				
CONTRACTOR:				
QTY:				
PART#:		STSM-P3E-ECO		
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:		
		Stair Tread, Single Stage, Recycled Rubber, 3 Eco-Tread Ribs Short Tip Nose, Alum Extruded Anchor, 1" Photoluminescent Resin Strip		
NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	DKL	4/3/23	A	Nystrom STSM-P3E-ECO ShpDr
RELEASED	TR	4/3/23	WEIGHT:	SHEET 1 OF 1