


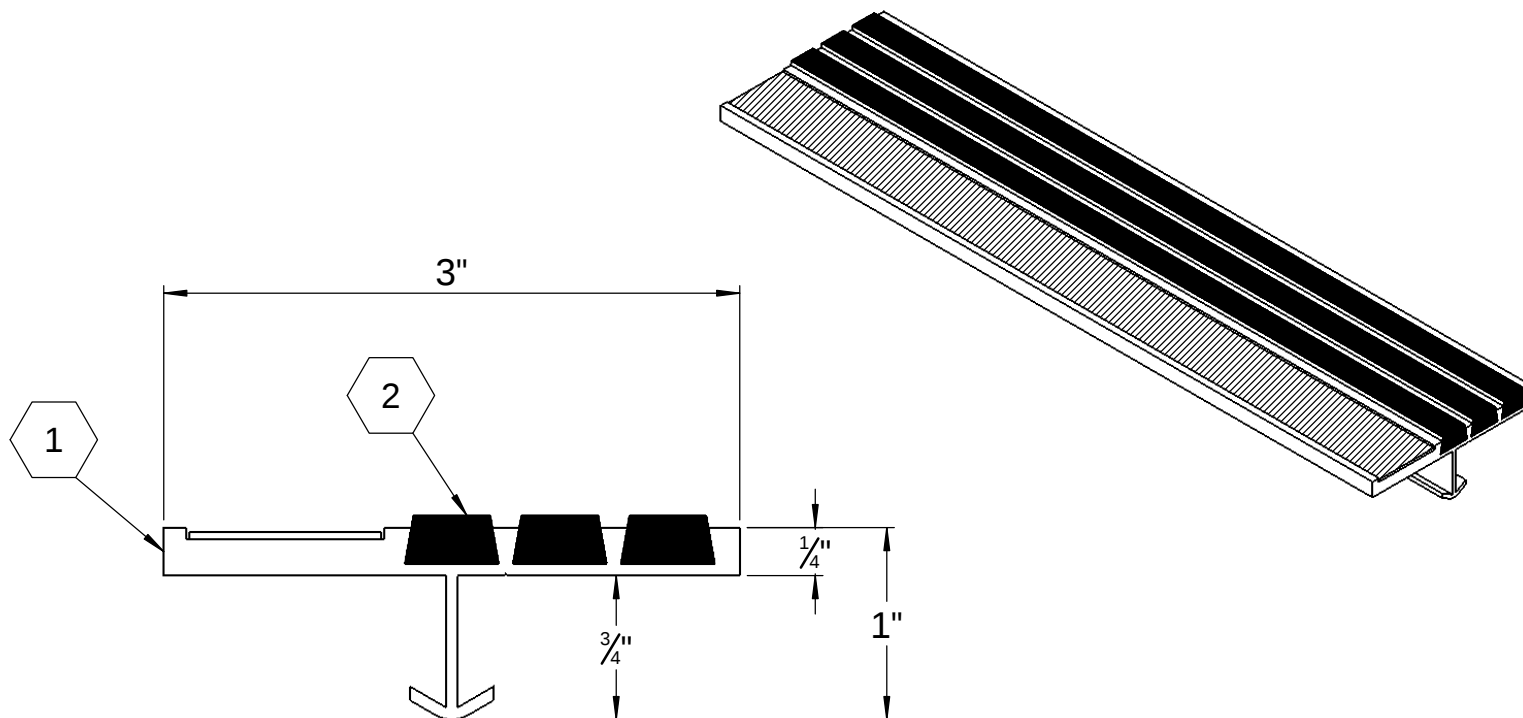

MODEL N3E-T-ECO

SPECIFICATIONS:

1. **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-6
2. **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES
ENCAPSULATED IN A WEAR AND WATER
RESISTANT ELASTOMERIC NETWORK. 2 PART
EPOXY, LOCKED INTO EXTRUDED CHANNELS
3. **BASE FINISH:** MILL
4. **POURED CONCRETE STAIRS:** NOSING SHALL
TERMINATE NO MORE THEN 3" FROM END OF STEPS
5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"
CLEARANCE

6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW
BLACK-BLUE, BLACK-GRAY
7. **LENGTH:** 120" MAXIMUM
8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-
LUMINESCENT MATERIAL SHALL NOT BE LESS
THAN 1"

LENGTH	QTY	COLOR

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:		STSM-N3E-T-ECO			
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:			
		Stair Tread, Single Stage, 3 Eco-tread Ribs, No Nose, Aluminum Extruded Anchor 1" Photoluminescent Grit Tape			
NAME	DATE	SIZE	DWG. NO.	REV	
DRAWN	DKL	8/31/23	A	Nystrom STN STSM-N3E-T-ECO ShpDr	
RELEASED	GLN	8/31/23	WEIGHT: 1.27 LB	SHEET 1 OF 1	